



www.vacutec.com

1.888.822.8832

Inert Gas Pack Instructions

Inert Gas Pack Kit (p/n WV-J-6901-89) includes:

- Pressure regulator
- 10 ft. coiled hose w/ quick coupler
- 20 oz. refillable liquid CO₂ aluminum cylinder w/ pin valve
- Spare o-ring 5 pack
- Two additional male coupler
- Plastic storage case

Inexpensive & easy to refill with liquid CO₂: at any paintball retailer, welding supply locations, many sporting goods stores and Lowes home improvement stores with a CO₂ cylinder exchange program.



Part No. WV-J-6901-89

Note: cylinder ships empty

SAFETY INSTRUCTIONS:

> Kit includes a refillable quality aluminum cylinder which is factory tested and complies with all government requirements (DOT-3AL & TC-3ALM). NOTE: Use of a non-certified cylinder may be harmful to operator.

> The brass pin valve in the regulator is designed specifically for CO₂ applications and must NOT be used with any other type of gas or liquid.

> Use safety glasses when operating this and other equipment.

> Store and operate with cylinder in upright position.

> Do not expose pressure cylinders to temperatures above 130° F / 54° C.

> Store cylinder in its storage case.

WARRANTY:


One Year consumer warranty, from date of purchase, against manufacturer's defects in material / workmanship.

ASSEMBLY & OPERATION INSTRUCTIONS:

1. Connect filled CO₂ cylinder to regulator by turning in clockwise direction.



2. Prior to connecting to smoke machine, adjust regulator pressure to 40 PSI.

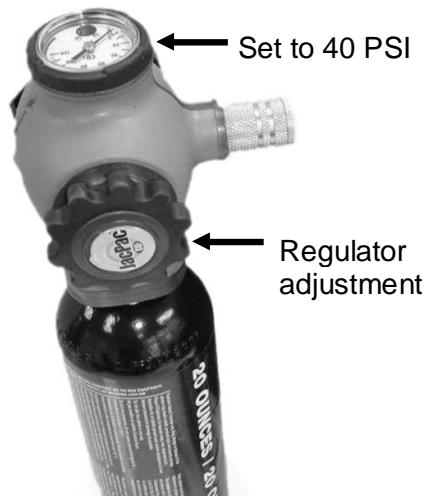

3. Connect regulator to smoke machine, either as shown or using coiled hose supplied. Note: It is normal for the 40 PSI set in step 2 to decrease when smoke machine is turned 'on'. As gas in cylinder is consumed, it may be necessary to readjust regulator pressure to 40 PSI.

